

Cat[®] Hydraulic Hammer Paste

Copper and Graphite Grease



Excellent Protection Even Under Extreme Heat and Repetitive Impact

Cat[®] Hydraulic Hammer Paste (Grease) is formulated to lower friction and improve tool and bushing life in the harsh environments encountered with Hydraulic impact hammer applications. These work tools generate high heat, severe shock, and heavy friction loads, which can fuse parts together. Cat Hydraulic Hammer Paste contains optimized amounts of copper and graphite to provide excellent wear protection even at temperatures higher than 2000°F (1,093°C).

BENEFITS

Performance

- Formulated for extreme temperatures and applications
- Strong adhesion, even in the presence of water
- Performs under conditions of dirt and contamination

Protection

- Significantly slows wear
- Prevents seizing
- Extremely stable and corrosion resistant
- Formulated for protection against dirt and contamination



Cat® Hydraulic Hammer Paste

Extended Tool and Bushing Life

Hydraulic hammers and other tools experience extreme conditions that can lead to rapid wear of guide bushings. Cat® Hydraulic Hammer Paste is formulated¹ to cling to parts even under conditions of high shock, extreme pressure, high temperature and extreme wet conditions.




Cat® Hydraulic Hammer Paste provides a layer of protection between the tool and guide bushings.

While these extreme conditions can cause other greases to break down, Cat Hydraulic Hammer Paste maintains its integrity. Even under harsh conditions, Cat Hydraulic Hammer Paste continues to protect machine components and dramatically slow wear. It does so by creating load bearing layers of protection that minimize metal-to-metal contact.

Typical Characteristics ²	
Color	Copper
NLGI Class	2
Thicker Type	Aluminum Complex
Base Oil Type	Mineral
Operating Range	-20 to 1,100°C (-4 to 2,012°F)
Worked Penetration (mm)	265-295
Viscosity @ 40°C, cSt	350
4 Ball E.P. Weld Point (kg)	550
Dropping Point	260°C (500°F)

¹Cat Hammer Paste (Grease) is designed for use in hammers only. Damage may result if Cat Hammer Paste is used on equipment other than hammers.

²The values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

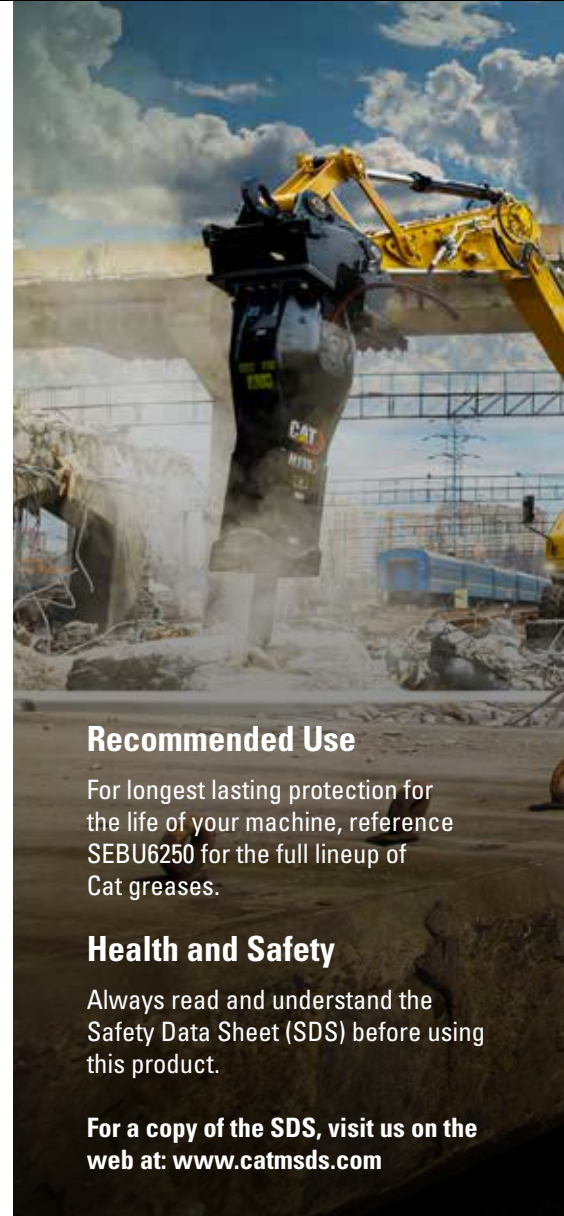

Recommended Use

For longest lasting protection for the life of your machine, reference SEBU6250 for the full lineup of Cat greases.

Health and Safety

Always read and understand the Safety Data Sheet (SDS) before using this product.

For a copy of the SDS, visit us on the web at: www.catmsds.com

CAT DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT.

We offer you the right parts and service solutions, when and where you need them.

The Cat Dealer network of highly trained experts keeps your fleet up and running to maximize your equipment investment.

LET'S DO THE WORK.™

