



C9.3

Marine Propulsion Engine Commercial Applications

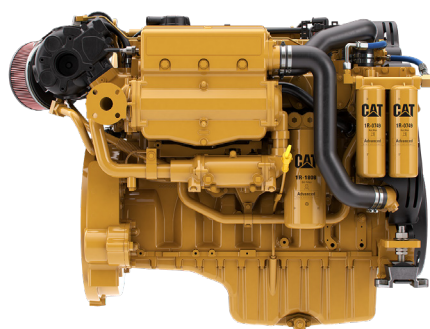

ENGINE SPECIFICATIONS

CONFIGURATION	Inline 6, 4-Stroke Cycle diesel
EMISSIONS	IMO II U.S. EPA Tier 3 China Stage II
RATED ENGINE SPEED	1,800, 2,100, 2,300 rpm
DISPLACEMENT	9.3 L (567.5 cu in)
ASPIRATION	Turbocharged-aftercooled
GOVERNOR	Electronic

BORE x STROKE	115 mm x 149 mm (4.5 in x 5.8 in)
REFILL CAPACITY	Lube Oil System w/oil filter change: 24.5 L (6.5 gal)
OIL CHANGE INTERVAL	500 hrs
FLYWHEEL HOUSING	SAE No. 1 (113 teeth)
ROTATION	Counterclockwise
COOLING	Heat exchanger and separate or combined keel cooled options

KEY FEATURES & BENEFITS

- Electronic control system provides industry-leading torque and throttle response at low speeds, while maintaining fuel efficiency at high speeds
- Common rail fuel system enables optimum combustion and low emissions
- RH and LH locations service options for fuel and oil filters, as well as dipstick location for easily accessible service
- Compatible with Cat® displays
- Available remote-mounted display panel with start, stop, and engine diagnostics
- 12V or 24V electrical system
- Certified by all marine classification societies

STANDARD EQUIPMENT

- Water-cooled turbocharger and exhaust manifold
- Electronic control system
- Thermostats and housing
- Gear-driven Sea water pump (self-priming)
- Common rail fuel system
- Shell and tube jacket water heat exchanger
- Corrosion-resistant Sea water aftercooler
- Engine oil cooler
- Vibration damper and guard
- Primary fuel filters

OPTIONAL ATTACHMENTS

- Alternators – 24V 70 or 105 amp, 12V 110 amp
- Closed crankcase ventilation
- Transmission gear oil cooler (engine mounted for HEX)
- Additional engine and transmission sensor packages
- Instrument panels
- Electric starting motors – 12V or 24V
- Air starting motor
- Dual electric starting motors or combined electric/air
- Electric fuel priming pump
- Fuel cooler
- PTO Drives – V-belt pulley stack, stub shaft
- Duplex fuel and oil filters
- Double wall fuel rail

RATINGS & FUEL CONSUMPTION


Rating	mhp	bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
B*	381	375	280	1800	18.7	214.9	II	T3C	NC	C-II
C	421	416	310	2100	21.2	216.2	II	T3C	NC	C-II
D	483	476	355	2300	24.1	218.1	II	T3C	NC	C-II

**Available with C1 Industrial Cycle for variable speed applications that don't comply with the propeller law.*

ENGINE DIMENSIONS & WEIGHT

PROPULSION ENGINE

LENGTH (1)	57.2 in / 1,452 mm
WIDTH (2)	38.5 in / 978 mm
HEIGHT (3)	43.0 in / 1,093 mm
DRY WEIGHT	2083 - 2474 lb / 945 - 1122 kg

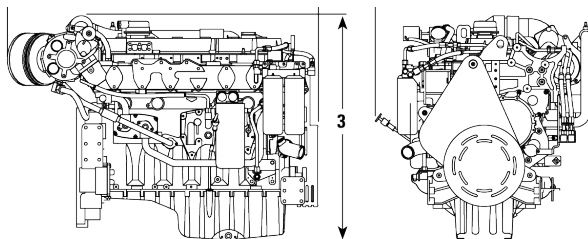

**Contact your Local Cat® Dealer
for more information!**

LEHM21495-00

©2023 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

